

Raised Tables & Zebra Crossings

One modular crossing system, cut to fit your road

A raised table and a zebra crossing are the same modular system, configured differently. Both are built from 1,500 × 1,900 mm pressed recycled-rubber panels with integral moulded ramps — surface-fixed with no excavation and installed in under a day. Panels are added for any length or width, and every order is machined at the factory to the exact carriageway for true kerb-to-kerb coverage. A raised table keeps its side ramps; a zebra crossing runs kerb to kerb. Height is fixed at 75 mm with gradients to DfT recommendations, suitable for formal zebra crossing designations.

KEY BENEFITS

- Complete crossing installed in under a day
- No excavation — significantly less disruption than construction
- Any length or width — factory-cut to your exact carriageway
- Fixed 75 mm height at DfT-recommended gradient angles
- Suitable for formal zebra crossing designations
- Every panel anchored through moulded-in 150 mm steel plates

APPLICATIONS

School access, town centres, residential side roads, hospital and campus crossings, and formal zebra crossings that need quick delivery.

COMMON SPECIFICATION

MATERIAL

100% recycled tyre crumb rubber (solid, pre-moulded)

HEIGHT

75 mm — fixed, DfT gradient recommendations

PANEL MODULE

1,500 × 1,900 mm

PANEL WEIGHT

~150 kg (end-ramp panel)

RAMP TAPERS

650 mm front and back · 269 mm sides

COLOURS

Black (RT-B) or red (RT-R)

MARKINGS

Directional arrows (+T1), zebra stripes, or plain

FIXING

Surface-fixed — anchors through moulded-in 150 mm steel plates

LIFTING

M16 lifting eyes fitted to pieces over 75 kg


Representative configurations

Any size is available — panels are added for length and width, then factory-cut to your carriageway. Use the online configurator for an exact drawing and panel schedule.


CODE	PLAN SIZE	HEIGHT	WEIGHT	PIECES	INSTALLATION
RT 5.7 × 3.0	5700 × 3000 mm	75 mm	~846 kg	6 panels	Under a day
RT-B-Z 7.3 × 4.5	7300 × 4500 mm	75 mm	~1,888 kg	12 panels	Under a day

OPTIONS & ACCESSORIES

- Directional arrow markings — one-way or two-way layouts
- Zebra crossing surface configuration (black only)
- Factory cutting to exact road width — symmetric cut panels, preferred minimum 1,000 mm
- Fixing kits supplied with every panel
- Online configurator generates a drawing and panel schedule for your exact road

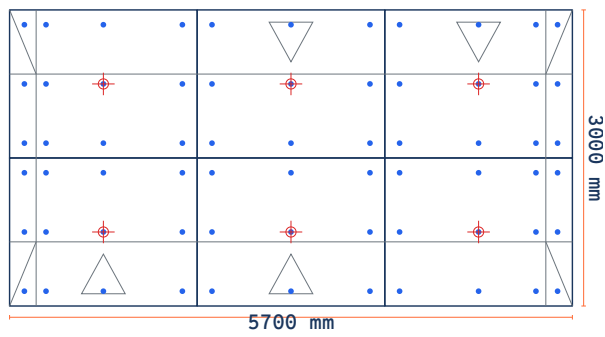

RT 5.7 × 3.0
5700 × 3000 mm

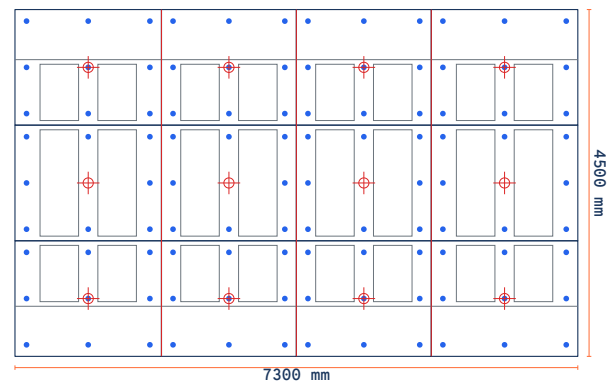

RT-B-Z 7.3 × 4.5
7300 × 4500 mm